

30 July 2025

ASX Market Announcements

**DRILLING ASSAY RESULTS FOR RARE EARTH ELEMENTS IN SOUTH AUSTRALIA
EL 6795 PARRAKIE, EL 6975 WILKAWATT AND EL 7015 PEAKE**

Ausmon Resources Limited ("Company") is pleased to announce the laboratory assay results for Aircore drilling samples submitted to ALS in Adelaide for Rare Earth Elements ("REEs") analyses via method ME-MS81.

The assayed samples were selected after preliminary pXRF scan of each sample acquired during the Aircore drilling conducted in May 2025 within the Limestone Coast Project within tenements Parrakie, Wilkawatt and Peake (**Figure 1**). A delay was experienced in the pXRF scanning due to equipment malfunction.

These 3 tenements cover a total area of 2,316 km² in the Murray Basin that host Loxton/Parilla sands prospective for REEs (**Figure 1**). Australian Rare Earths (ASX:AR3), exploring to the south of these tenements has reported significant exploration success at their Koppamurra REEs Project with estimated JORC 2012 resource of 236Mt @ 748 ppm Total Rare Earth Oxides ("TREO") (AR3 ASX Release on 30 September 2024).

Significant Assays – ppm TREO*

25PEAC005 11-12M 1m @ 2,192
25WWAC027 12-15m 3m @ 766.5 (incl 12-13m 1m @ 1,088)
25PEAC006 8-9m 1m @ 505
25WWAC030 16-17m 1m @ 495
25WWAC029 12-13m 1m @ 472
25WWAC033 14-15m 1m @ 472

*ppmTREO=(Ce₂O₃+Dy₂O₃+Er₂O₃+Eu₂O₃+Gd₂O₃+Ho₂O₃+La₂O₃+Lu₂O₃+Nd₂O₃+Pr₆O₁₁+Sc₂O₃+Sm₂O₃+Tb₄O₇+Y₂O₃+Yb₂O₃)

The current TREO results combined with the results of the two 2024 drilling programs (see AOA ASX releases on 29 July 2024 and 21 March 2024) within Parrakie provide high encouragement on the tenements under exploration. The identified trend of mineralisation covers significant acreage for further drilling see shaded areas LC01, LC02 and LC03 in **Figure 2**.

The Company completed 1,001m of shallow Aircore drilling for 57 holes with holes averaging depth of 18 m concentrating within Wilkawatt and Peake which are adjacent to the south and east of Parrakie (see **Figures 1 and 2**) to test the possible extension of the previously identified

encouraging drill intersections REEs at Parrakie. Some additional areas within the north east corner of Parrakie have also been drilled. **Figures 3 and 4** display the locations of the drill traverses.

The 2024 and 2025 road verge drilling programs have delineated 3 areas with elevated REE results, shaded area as shown in **Figure 2** for a total area of 122 km². The road verge drilling was very broadly spaced (0.5 to 1 km) to maximise coverage across the tenements at minimum costs and to identify areas with higher TREO grade. The 3 target areas LC01, LC02 and LC03 represent a large area to explore and the future drill spacing will be of the order of 200 m - 400 m to focus more closely on the areas with higher ppm TREO. The next phase of Aircore drilling having regards to the assay results will extend from road verges to freehold land that will require access agreements and community consultations.

Next Exploration Phase:

- *Assemble cadastral information in the areas of interest including landholder details.*
- *Contact landholder and run community meetings for support of shallow aircore drilling.*
- *Delineate proposed drill collars within all 3 areas where access is available and rank based on drill hole assays.*
- *Finalise drill hole locations based on the above and prepare budget and funding for drilling.*
- *Commence planning of drilling program and application for EPEPR with DEM.*

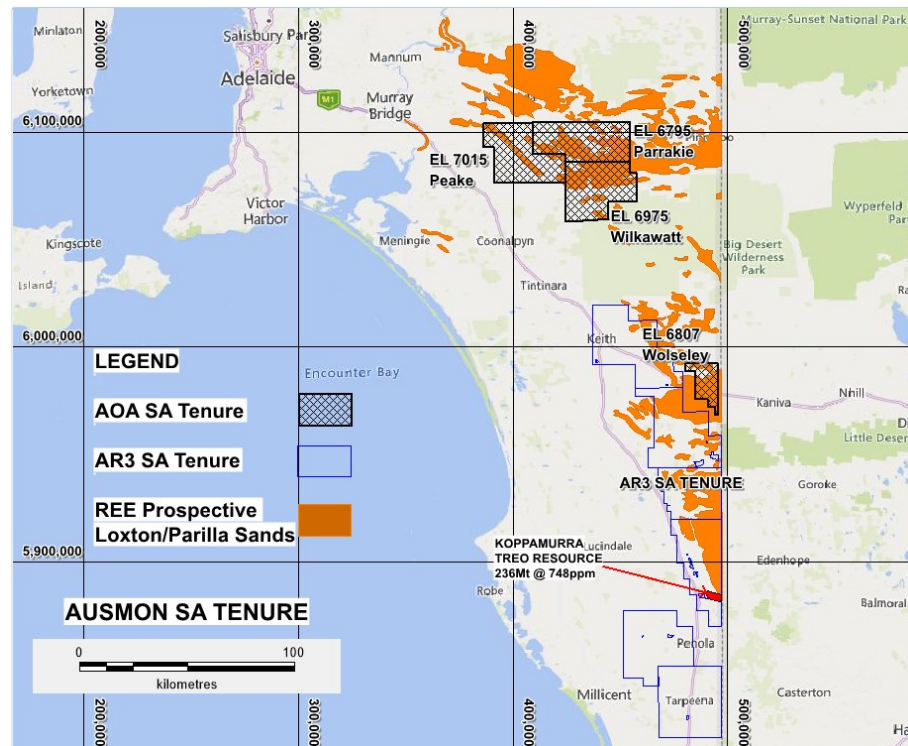


Figure 1: Ausmon South Australian Exploration Tenements

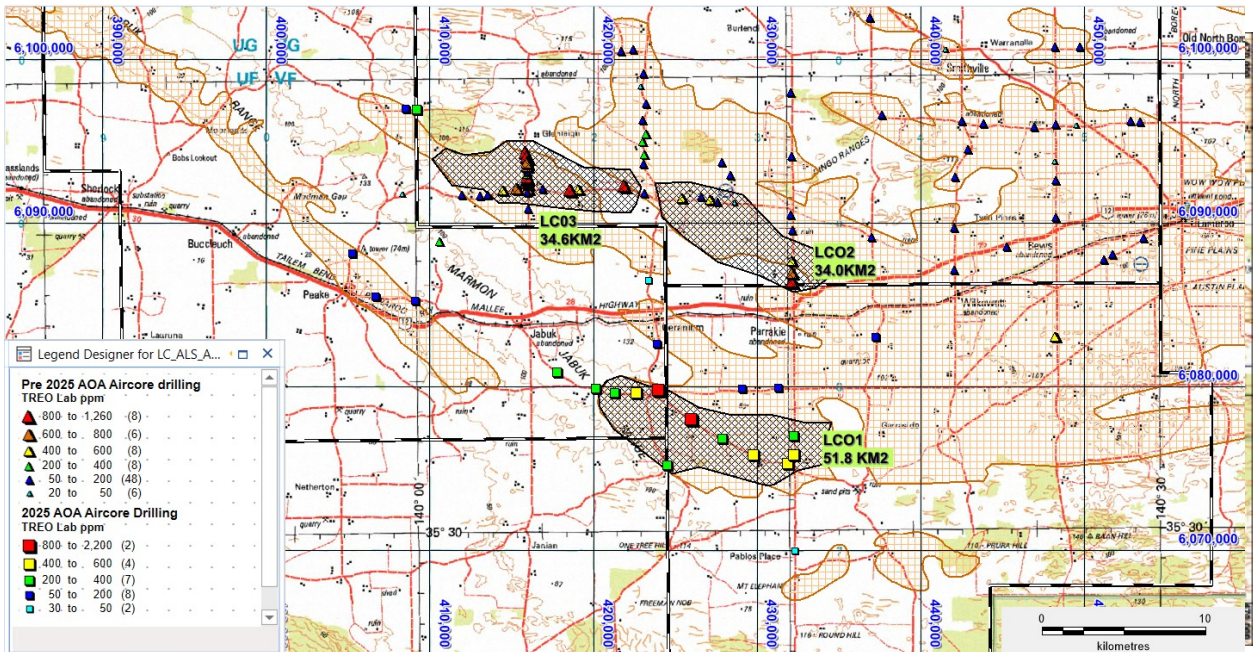


Figure 2: Maximum ppm TREO in the 2025 and 2024 aircore drilling programs that targeted the potentially REE mineralised Loxton Parilla Sands (brown)

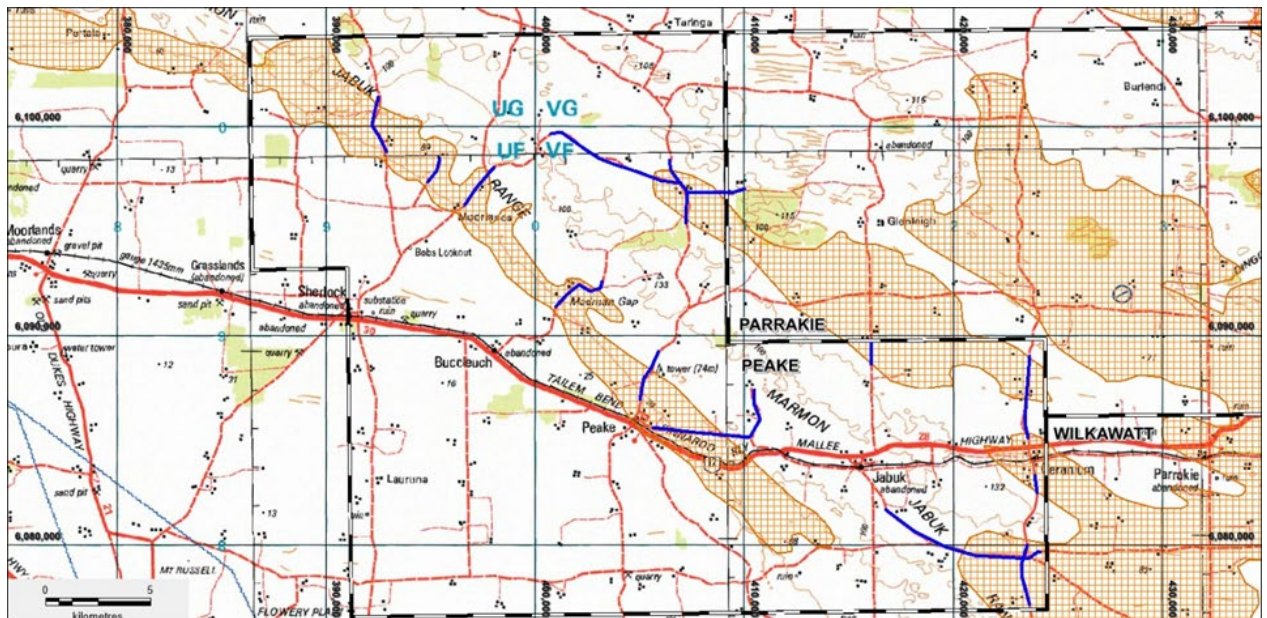


Figure 3: Location of the drilling traverses (blue) across the Peake and Parrakie tenements. The prospective Loxton/Parilla sands are shown in brown hatching.

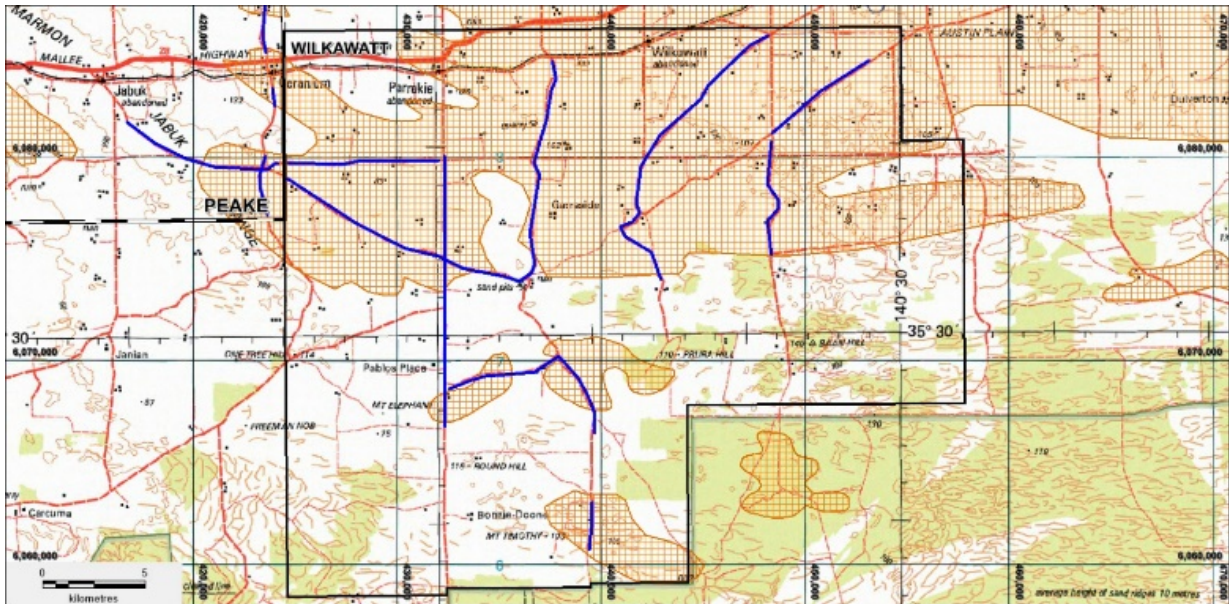


Figure 4: Location of the drill traverses (blue) within the Wilkawatt tenement. The prospective Loxton Parilla Sands are shown in brown hatching.

Competent Person Statement

The information in the report above that relates to Exploration Results, Exploration Targets and Mineral Resources is based on information compiled by Mr Mark Derriman, who is the Company's Consultant Geologist and a member of The Australian Institute of Geoscientists (1566). Mr Mark Derriman has sufficient experience that is relevant to the style of mineralization and type of deposit under consideration and to the activities which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Exploration Targets, Mineral Resources and Ore Reserves. Mr Mark Derriman consents to the inclusion in this report of matters based on his information in the form and context in which it appears.

Forward-Looking Statement

This document may include forward-looking statements. Forward-looking statements include, but are not limited to, statements concerning planned exploration program and other statements that are not historical facts. When used in this document, the words such as "could", "plan", "estimate", "expect", "intend", "may", "potential", "should" and similar expressions are forward-looking statements. Although Ausmon Resources Limited believes that its expectations reflected in these forward-looking statements are reasonable, such statements involve risks and uncertainties and no assurance can be given that actual results will be consistent with these forward-looking statements.

Authorised by:

Eric Sam Yue

Executive Director/Secretary

T: 02 9264 6988

E: office@ausmonresources.com.au

JORC Code, 2012 Edition – Table 1 Peake Wilkawatt and Parrakie Drilling Results Received

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	- Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. - Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. - Aspects of the determination of mineralisation that are Material to the Public Report. - In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.	3kg samples were collected in prenumbered calico bags for every meter. - The drilling was completed on 19th May 2025 - The samples were sent to the ALS Geochemical Laboratory in Adelaide - A hand-held Garmin GPS unit was used to record the drill collars as MGA 2020 Zone 54 - OREAS standard 465 and a blank were inserted into the sample sequence every 30th sample. Duplicate samples were also collected every 50th sample
Drilling techniques	Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	- Fifty Seven(57) vertical aircore holes were completed for 1,001m. - Drilled by GPS Drilling - Drilling along district council verges - Holes were not oriented
Drill sample recovery	- Method of recording and assessing core and chip sample recoveries and results assessed. - Measures taken to maximise sample recovery and ensure representative nature of the samples. - Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	- A 3kg split was collected for every meter in a pre-numbered calico bag, the remainder of the meter interval was put back down the hole as part of the rehabilitation. - There was little contamination, and the holes were dry - The visual estimation was that the recovery was very good. - Every effort was made by the drillers to maximise recovery. - A representative sample of every meter was collected in pre numbered plastic chip trays - All chip trays and rehabilitation were photographed

Criteria	JORC Code explanation	Commentary
Logging	- Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. - Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. - The total length and percentage of the relevant intersections logged.	- The drill holes were logged by an experienced geological contractor employed by Perth Based Consultancy Speccy Science(SS) - The detail of the logging is appropriate for the early stage of exploration. - Every meter was logged individually
Sub-sampling techniques and sample preparation	- If core, whether cut or sawn and whether quarter, half or all core taken. - If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. - For all sample types, the nature, quality and appropriateness of the sample preparation technique. - Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. - Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. - Whether sample sizes are appropriate to the grain size of the material being sampled.	- All of the sample was collected and placed in prenumbered calico bags. - The meter samples were scanned initially with the Companies Evident Vanta pXRF and based on the pXRF readings and detailed logging 148 samples (each sample being a meter of drilling) were selected to be sent to ALS for full multi element geochemical analyses - This is appropriate for the early level of exploration and appropriate for the material being sampled.
Quality of assay data and laboratory tests	- The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. - For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. - Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.	- All samples were placed into pre numbered polywoven bags and sent to ALS in Adelaide for method ME-MS81 using a 0.1g sample - The analyses were by a lithium borate fusion and IPP-MS analyses that provides the most quantitative analytical approach for a broad suite of trace elements. 2kg of the sample was split and dry crushed < 75 microns (Prep 2,3) - Drill Samples (Lower Limit of Detection/Upper Limit of Detection) – Ba(0.5/10000), Ce(0.1/10000), Cr(5/10000), Cs(0.01/10000), Dy(0.05/1000), Er(0.02/1000), EU(0.02/1000), Ga(0.1/1000), Gd(0.05/1000), Hf(0.05/1000), Ho(0.01/1000), La(0.1/10000), Lu(0.01/1000), Nb(0.1/2500), Nd(0.1/10000), Pr(0.02/1000), Rb(0.2/10000), Sc(0.5/500), Sm(0.03/1000), Sn(0.5/10000), Sr(0.1/10000), Ta(0.01/1000), Tb(0.01/1000), Th(0.05/1000), Ti(0.01/10%), Tm(0.01/1000), U(0.05/1000), V(5/10000), W(0.5/10000), Y(0.1/10000), Yb(0.03/1000) and Zr(1/10000)(A table is included in the announcement showing all

Criteria	JORC Code explanation	Commentary
		geochemical results). The detection limits are in brackets are ppm unless indicated
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel.</i> <i>The use of twinned holes.</i> <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> <i>Discuss any adjustment to assay data.</i>	- Sample sites were chosen by the Speccy Science Principal Geologist and verified by the site geologist. - All primary data, data entry procedures, data verification and electronic data storage is per Ausmon procedures. - All drill collars was based on hand-held GPS sample locations. - Appropriate sampling techniques were used based on discussions with ALS laboratory
Location of data points	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> <i>Specification of the grid system used.</i> <i>Quality and adequacy of topographic control.</i>	- All drill collars were initially surveyed using a hand-held GPS accurate to 3 meters. - The grid system used in MGA 2020 Zone 54.with the drill collars located in the field with a hand-held GPS using the MGA 2020 Zone 54datum. - There is little height variation across the area of drilling
Data spacing and distribution	<i>Data spacing for reporting of Exploration Results.</i> <i>Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> <i>Whether sample compositing has been applied.</i>	- Drill spacing is appropriate for this stage of Exploration. - Sample spacing was designed to allow appropriate anomaly definition for this early stage of exploration.
Orientation of data in relation to geological structure	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	Drill traverses were designed along road verges with available sites for an aircore drilling operation targeting the flat lying Loxton Parilla Sands to an average depth of 17m and maximum depth of 20m.
Sample security	<i>The measures taken to ensure sample security.</i>	All samples were secured by field geologist and delivered to the laboratory after the sampling program was completed by the Principal Geologist of Speccy Science
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	The sampling technique was reviewed onsite by Speccy Science and the site geologist.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	- Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. - The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	- Drilling completed in EL 6795 (Parrakie) 6975 (Wilkawatt) and 7015 (Peake), in South Australia, Australia - The tenements are owned by AusPEM, a subsidiary of Ausmon Resources Limited. - The tenements are located in South Australia approximately 300km east of Adelaide - Lameroo and Pinaroo are the nearest town - There are no JVs and Royalties - There are no Native Title claimants - The tenements are located in the Limestone Coast Inspectorate
<i>Exploration done by other parties</i>	Acknowledgment and appraisal of exploration by other parties.	- Churchill explored for diatomite bearing siltstone in the top of the Parilla sand in the central portion of the licence. - Agricola Minerals for diatomite deposits near the town of Germanium bearing siltstone in the top of the Parilla sand in the central portion of the licence following the work of Churchill who didn't measure absorbencies – no diatomite indicated.. - Iluka Resources explored for heavy minerals across the tenement with rutile and zircon not being abundant.
<i>Geology</i>	Deposit type, geological setting and style of mineralisation.	The deposit type being explored for is REE mineralized ionic clays associated with the Loxton/Parilla Sands of the Otway and Murray Sedimentary Basins in South Australia.
<i>Drill hole Information</i>	- A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: - easting and northing of the drill hole collar - elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar - dip and azimuth of the hole - down hole length and interception depth - hole length. - If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from	All drill collar information is included in a Table in the announcement

Criteria	JORC Code explanation	Commentary
	<i>the understanding of the report, the Competent Person should clearly explain why this is the case.</i>	
<i>Data aggregation methods</i>	<i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> <i>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i>	The sample results were reported a single meter assays and there was no sample aggregation
<i>Relationship between mineralisation widths and intercept lengths</i>	<i>These relationships are particularly important in the reporting of Exploration Results.</i> <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i>	- The mineralisation is located in the Murray Basin and the target is the flat or near flat lying Loxton/Perilla sands. - the sampling is appropriate for this level of exploration
<i>Diagrams</i>	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	A map showing the drill collar locations in relation to ELs 6795,7015 and 6975, is included in the announcement.
<i>Balanced reporting</i>	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	All exploration results for the multi elements are included a tables in the announcement
<i>Other substantive exploration data</i>	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	There is no other relevant information to add
<i>Further work</i>	<i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	Infill and extension drilling along the road verges ahead of more closely spaced drilling within freehold land parcels adjacent to the road drilling sited within EL 6795,6975 and 7015.

SampleID	HotelID	mFrom	mTo	GDA2020 MGA54 mN	GDA2020 MGA54 mE	Ce	Ce203	Dy	Dy203	Er	Er203	Eu	Eu203	Gd	Gd203	Ho	H0203	La	La203	Lu	Lu203	Nd	Nd203	Pr	Pr6011	Sc	Sc203	Sm	Sm203	Tb	Tb407	Y	Y203	Yb	Yb203	TREE	TREE0
PKAC0272	25PEAC001	4.00	5.00	409211.00	6096891.00	78.10	91.48	5.06	5.81	2.71	3.10	1.28	1.48	5.51	6.35	0.99	1.13	28.90	33.89	0.38	0.43	29.60	34.53	7.93	9.58	12.00	18.41	6.66	7.72	0.85	1.00	25.00	31.75	2.40	2.73	207.37	249.39
PKAC0273	25PEAC001	5.00	6.00	409211.00	6096891.00	26.80	31.39	2.01	2.31	1.18	1.35	0.54	0.63	2.25	2.59	0.43	0.49	11.20	13.14	0.16	0.18	12.40	14.46	3.07	3.71	9.90	15.18	2.67	3.10	0.35	0.41	9.10	11.56	1.32	1.50	83.38	102.00
PKAC0274	25PEAC002	4.00	5.00	423942.00	6082582.00	43.40	50.83	4.33	4.97	2.39	2.73	1.09	1.26	4.97	5.73	0.89	1.02	25.50	29.91	0.30	0.34	26.00	30.33	6.67	8.06	5.00	7.67	5.20	6.03	0.71	0.84	25.20	32.00	1.98	2.25	153.63	183.97
PKAC0275	25PEAC003	11.00	12.00	423382.00	6086449.00	9.80	11.48	0.94	1.08	0.57	0.65	0.20	0.23	0.85	0.98	0.20	0.23	6.00	7.04	0.10	0.11	4.30	5.02	1.25	1.51	7.60	11.66	1.00	1.16	0.14	0.16	4.40	5.59	0.62	0.71	37.97	47.60
PKAC0277	25PEAC005	11.00	12.00	424016.00	6079701.00	819.00	959.29	44.00	50.50	21.70	24.81	12.95	14.99	50.40	58.09	8.26	9.46	238.00	279.13	2.54	2.89	295.00	344.09	72.80	87.96	14.20	21.78	61.10	70.85	7.50	8.82	187.50	238.11	18.75	21.35	1853.70	2192.12
PKAC0276	25PEAC005	10.00	11.00	424016.00	6079701.00	62.50	73.21	15.85	18.19	9.77	11.17	2.94	3.40	15.35	17.69	3.33	3.81	52.70	61.81	1.25	1.42	52.80	61.59	12.40	14.98	12.80	19.63	11.60	13.45	2.32	2.73	68.90	87.50	8.61	9.80	333.12	400.39
PKAC0278	25PEAC006	8.00	9.00	422636.00	6079547.00	98.60	115.49	11.05	12.68	5.93	6.78	3.28	3.80	14.45	16.66	2.13	2.44	88.90	104.26	0.63	0.72	87.40	101.94	21.60	26.10	9.30	14.26	16.45	19.08	1.94	2.28	55.40	70.35	4.71	5.36	421.77	502.20
PKAC0279	25PEAC007	7.00	8.00	420188.00	6079837.00	95.60	111.98	8.79	10.09	4.85	5.55	2.13	2.47	9.37	10.80	1.78	2.04	39.10	45.86	0.60	0.68	45.30	52.84	10.65	12.87	8.40	12.88	9.58	11.11	1.44	1.69	47.40	60.19	4.27	4.86	289.26	345.90
PKAC0280	25PEAC008	10.00	11.00	417834.00	6080803.00	60.30	70.63	4.04	4.64	2.34	2.68	1.19	1.38	4.60	5.30	0.81	0.93	26.60	31.20	0.37	0.42	25.70	29.98	6.70	8.09	15.40	23.62	5.18	6.01	0.69	0.81	21.80	27.68	2.26	2.57	177.98	215.93
PKAC0281	25PEAC011	6.00	7.00	409116.00	6085205.00	14.40	16.87	1.32	1.51	0.74	0.85	0.30	0.35	1.53	1.76	0.28	0.32	8.50	9.97	0.11	0.13	7.90	9.21	1.90	2.30	1.40	2.15	1.62	1.88	0.21	0.25	7.70	9.78	0.72	0.82	48.63	58.13
PKAC0282	25PEAC012	7.00	8.00	406733.00	6085444.00	25.80	30.22	2.16	2.48	1.22	1.40	0.56	0.65	2.39	2.75	0.45	0.52	12.60	14.78	0.19	0.22	12.70	14.81	3.12	3.77	5.50	8.44	2.50	2.90	0.38	0.45	11.60	14.73	1.21	1.38	82.38	99.48
PKAC0283	25PEAC017	8.00	9.00	405270.00	6088087.00	19.70	23.07	1.63	1.87	0.87	0.99	0.38	0.44	2.06	2.37	0.32	0.37	8.80	10.32	0.10	0.11	9.60	11.20	2.46	2.97	1.90	2.91	2.12	2.46	0.28	0.33	8.40	10.67	0.77	0.88	59.39	70.97
PKAC0284	25PEAC021	1.00	2.00	408553.00	6096924.00	49.90	58.45	2.94	3.37	1.72	1.97	0.80	0.93	3.52	4.06	0.61	0.70	21.90	25.68	0.22	0.25	21.60	25.19	5.57	6.73	6.90	10.58	4.21	4.88	0.50	0.59	14.60	18.54	1.45	1.65	136.44	163.57
PKAC0286	25PEAC022	10.00	11.00	421352.00	6079572.00	151.00	176.87	5.53	6.35	3.20	3.66	1.46	1.69	5.81	6.70	1.06	1.21	28.00	32.84	0.41	0.47	33.70	39.31	8.78	10.61	10.30	15.80	7.40	8.58	0.89	1.05	23.50	29.84	3.02	3.44	284.06	338.40
PKAC0285	25PEAC022	9.00	10.00	421352.00	6079572.00	46.90	54.93	3.96	4.54	2.19	2.50	1.24	1.44	5.07	5.84	0.75	0.86	35.50	41.63	0.28	0.32	34.10	39.77	8.43	10.19	7.60	11.66	5.95	6.90	0.68	0.80	17.20	21.84	1.84	2.10	171.69	205.33
PKAC0254	25WWAC005	0.00	1.00	437308.00	6082973.00	32.50	38.07	2.31	2.65	1.36	1.56	0.74	0.86	2.63	3.03	0.46	0.53	16.80	19.70	0.23	0.26	14.80	17.26	4.06	4.91	7.80	11.96	2.69	3.12	0.41	0.48	12.30	15.62	1.31	1.49	100.40	121.50
PKAC0255	25WWAC018	16.00	17.00	432334.00	6069949.00	9.30	10.89	0.80	0.92	0.41	0.47	0.16	0.19	0.61	0.70	0.17	0.19	5.50	6.45	0.06	0.07	3.80	4.43	1.01	1.22	3.70	5.68	0.69	0.80	0.11	0.13	4.50	5.71	0.55	0.63	31.37	38.48
PKAC0257	25WWAC021	14.00	15.00	432262.00	6076953.00	105.50	123.57	6.67	7.66	3.80	4.35	2.19	2.54	8.81	10.15	1.30	1.49	40.50	47.50	0.41	0.47	45.50	53.07	11.15	13.47	7.70	11.81	8.87	10.29	1.23	1.45	36.60	46.48	2.76	3.14	282.99	337.42
PKAC0256	25WWAC021	1.00	2.00	432262.00	6076953.00	65.40	76.60	5.37	6.16	3.01	3.44	1.58	1.83	6.75	7.78	1.05	1.20	28.40	33.31	0.37	0.42	33.30	38.84	8.29	10.02	12.40	19.02	7.37	8.55	0.97	1.14	27.10	34.41	2.60	2.96	203.96	245.69
PKAC0258	25WWAC023	8.00	9.00	431338.00	6079889.00	26.10	30.57	2.51	2.88	1.82	2.08	0.31	0.36	2.14	2.47	0.56	0.64	13.30	15.60	0.29	0.33	11.90	13.88	3.18	3.84	8.40	12.88	2.63	3.05	0.36	0.42	14.00	17.78	2.02	2.30	89.52	109.09
PKAC0259	25WWAC024	11.00	12.00	429125.00	6079816.00	21.50	25.18	2.07	2.38	1.26	1.44	0.50	0.58	1.96	2.26	0.42	0.48	10.20	11.96	0.19	0.22	10.30	12.01	2.70	3.26	8.50	13.04	2.22	2.57	0.32	0.38	9.50	12.06	1.32	1.50	72.96	89.33
PKAC0262	25WWAC027	12.00	13.00	426037.00	6077903.00	368.00	431.04	19.50	22.38	9.04	10.34	7.24	8.38	25.20	29.05	3.49	4.00	134.00	157.16	1.02	1.16	176.50	205.87	44.10	53.28	12.40	19.02	35.40	41.05	3.57	4.20	73.70	93.59	7.34	8.36	920.50	1088.87
PKAC0263	25WWAC027	13.00	14.00	426037.00	6077903.00	88.50	103.66	21.30	24.45	11.90	13.61	6.08	7.04	26.10	30.08	4.18	4.79	131.00	153.64	1.14	1.30	141.00	164.46	34.40	41.56	12.40	19.02	27.20	31.54	3.75	4.41	108.00	137.15	8.16	9.29	625.11	745.99
PKAC0265	25WWAC027	14.00	15.00	426037.00	6077903.00	113.00	132.36	10.50	12.05	6.52	7.46	2.68	3.10	13.15	15.16	2.32	2.66	39.20	45.97	0.58	0.66	49.60	57.85	11.70	14.14	16.20	24.85	11.05	12.81	1.80	2.12	101.50	128.89	4.11	4.68	383.91	464.76
PKAC0264	25WWAC027	14.00	15.00	426037.00	6077903.00	106.50	124.74	10.55	12.11	6.56	7.50	2.59	3.00	12.95	14.93	2.32	2.66	36.50	42.81	0.59	0.67	48.00	55.99	11.00	13.29	17.60	26.99	10.70	12.41	1.86	2.19	101.00	128.26	4.21	4.79	372.93	452.34
PKAC0260	25WWAC027	11.00	12.00	426037.00	6077903.00	145.50	170.42	3.45	3.96	2.17	2.48	0.96	1.11	3.55	4.09	0.69	0.79	14.00	16.42	0.29	0.33	15.50	18.08	3.85	4.65	10.10	15.49	3.52	4.08	0.58	0.68	19.60	24.89	2.05	2.33	225.81	269.82
PKAC0266	25WWAC028	6.00	7.00	427902.00	6076789.00	34.70	40.64	6.84	7.85	3.80	4.35	1.60	1.85	7.79	8.98	1.36	1.56	30.50	35.77	0.40	0.45	31.10	36.28	7.44	8.99	6.60	10.12	6.90	8.00	1.14	1.34	39.60	50.29	2.90	3.30	182.67	219.77
PKAC0267	25WWAC029	12.00	13.00	429789.00	6075775.00	193.00	226.06	10.70	12.28	5.95	6.80	2.69	3.11	10.40	11.99	2.04	2.34	40.30	47.26	0.77	0.88	51.70	60.30	12.90	15.59	5.80	8.90	11.70	13.57	1.76	2.07	43.20	54.86	5.50	6.26	398.41	472.27
PKAC0268	25WWAC030	16.00	17.00	431938.00	6075262.00	200.00	234.26	11.65	13.37	5.96	6.82	3.02	3.50	11.20	12.91	2.20	2.52	47.70	55.94	0.73	0.83	52.20	60.89	13.10	15.83	2.90	4.45	12.40	14.38	1.90	2.23	47.90	60.83	5.63	6.41	418.49	495.16
PKAC0269	25WWAC031	9.00	10.00	424568.00	6075125.00	138.00	161.64	5.16	5.92	2.91	3.33	1.48	1.71	5.50	6.34	1.05	1.20	23.10	27.09	0.37	0.42	29.80	34.76	7.19	8.69	5.00	7.67	6.71	7.78	0.87	1.02	22.40	28.45	2.62	2.98	252.16	299.01
PKAC0271	25WWAC033	14.00	15.00	432278.00	6075791.00	131.00	153.44	12.20	14.00	6.73	7.70	2.60	3.01	12.60	14.52	2.41	2.76	60.60	71.07	0.88	1.00	66.80	77.92	16.80	20.30	5.80	8.90	12.75	14.78	2.00	2.35	57.80	73.40	5.99	6.82	396.96	471.97
PKAC0270	25WWAC033	10.00	11.00	432278.00	6075791.00	14.50	16.98	0.96	1.10	0.60	0.69	0.25	0.29	0.91	1.05	0.18	0.21	7.80	9.15	0.08	0.09	5.90	6.88	1.63	1.97	2.70	4.14										